

## Knipex Pliers

High quality pliers with polished head, and box joint from special steel, oil hardened. PVC coated handles with return spring. Overall length 115mm.

<b>P055</b>	Knipex pliers, <b>flat</b> nosed	each
<b>P056</b>	Knipex pliers, <b>snipe</b> nosed	each



## Knipex Diagonal Cutters

High quality strong cutters, with polished head, and box joint from special steel, oil hardened. PVC coated handles with return spring. Full flush cutting. Overall length 115mm.

<b>P057</b>	Knipex diagonal cutters	each
-------------	-------------------------	------

## Knipex Super Knips

### (Cutting Pliers)


High quality, precision cutters. With polished head accurately shaped tips for cutting soft wires down to 0.2mm diameter. Long life cutting edges without bevel for flush cutting. Made from stainless steel with handles covered in a new cushioned plastic and with return spring. Both cutters are 125mm long.

Knipex super knips , narrow cutting tips for cutting soft wire 0.2mm to 1.2mm diameter.

**P058** Knipex super knips, narrow tips each

Knipex super knips, straight cutting jaws accurately shaped for flush cutting soft wire 0.2mm to 1.6mm diameter.

**P059** Knipex super knips, straight jaws each

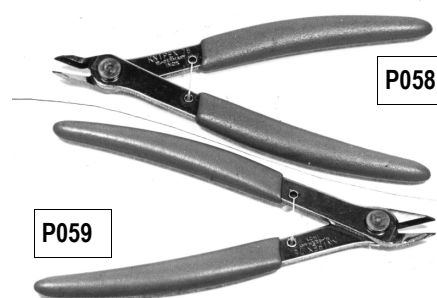

## Lindström RX Series Diagonal Cutters

### Ergonomic ESD Dissipative

The RX range is manufactured from special steel with precision screw joint and lap-joint construction. All cutting edges are induction hardened to 63-65 HRC, for increased tool reliability and consistency. All models have a 3 position return spring (replaceable) to adjust the tool width and spring tension to suit individual hand sizes and strengths. Dual composition cushioned grip handles. ESD protection for conducting away static electricity, to European standard EN100 015.

Model RX8141 flush cutters, length of cut 10.5mm, cutting capacity - copper wire 0.10 to 1.25mm. Overall length 135mm.

**P230** Lindström 'RX' diagonal cutters each

Model RX8247 flush oblique cutters, 45° angle. length of cut 6.7mm, cutting capacity - copper wire 0.20 to 1.00mm. Overall length 135mm.

**P231** Lindström 'RX' oblique cutters each


**P496** Spare torsion springs pk5



## Electricians Pliers


With pipe grip, side cutters and two joint cutters. Polished head. PVC handles insulated to withstand 1000 volts AC, 1500 volts DC.

**P233** Electricians pliers each

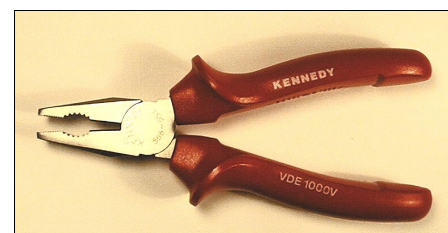

## De-Soldering Pump

This tool may be loaded and unloaded with one hand. The tip is replaceable, it is made of low resistance Teflon for long life. The spring loaded stroke and convenient size, together with the superior suction makes this a highly efficient unit, care and maintenance are reduced to a minimum because of the simple design and construction – only 3 separate pieces. Length 217mm, tip diameter 3.00mm

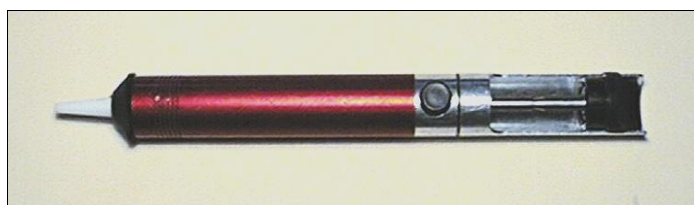

**P197** De-Soldering pump each

**P197/1** Replacement tip each